

Evo 6 SH

The Evo6SH is a mid-high skeletal loudspeaker offering very high output and controlled directivity. It can be used in a wide range of applications which include being the high power mid-high section of a multi-way PA system (for example with F215s and F221s/BR221s) or in demanding speech based applications such as theatrical voice reinforcement.

Features:

- Fully horn loaded for high efficiency
- Two-way (passive version available)
- Funktion-One designed drivers
- Low weight Neodymium magnets throughout
- Includes stainless steel mounting yoke
- Optional scrim for discrete appearance
- Evo6EH version available in wooden enclosure
- Evo7SH available with narrower dispersion & higher intensity



Driver	Operating Band*	Sensitivity (1W at 1m)	Power (rms**)	Nominal Impedance
10"	200 - 4kHz	108dB	250W	16Ω
1.4"	4kHz - up	109dB	75W	32Ω

*Please check website for latest crossover settings

**AES rated

Frequency Response ± 3 dB:

200Hz - 18kHz

Weight:




20.5kg (45lbs)

Nominal Dispersion:

50° Horizontal x 25° Vertical

Connectors:

Speakon NL4

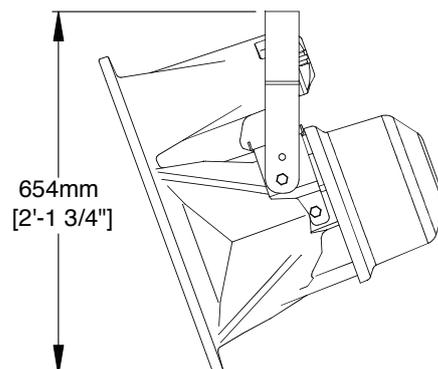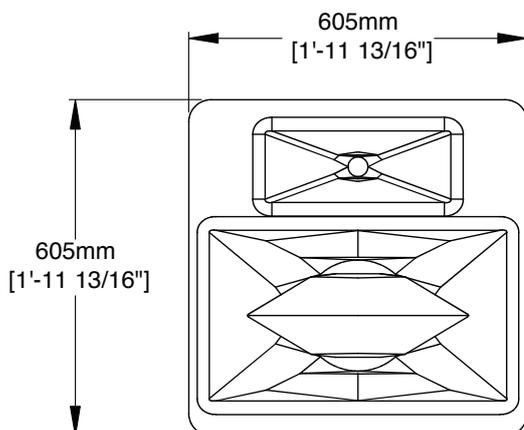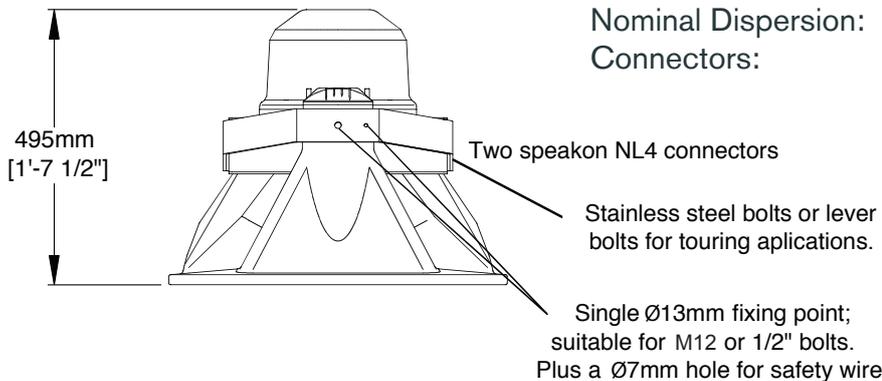

Yoke allows $\approx 135^\circ$ of rotation

